



**Very high traction nozzles**, torpedo shaped.

5° and 10° rear jets have a low impact on the pipe walls, so the nozzles can be used in old sewers.


In case of siphons or holes, they can be very helpful in emptying the water in order to avoid damages to the CCTV equipment.

A deviator set inside the nozzle maximizes flow efficiency reducing pressure drops inside the nozzle.

Suitable for sand removal and long runs jobs.

All ceramic inserts.

	3/4" F	1" F	1 1/4" F
<b>Width x Length (in)</b>	2.7" x 5"	3.9" x 8.25"	3.9" x 8.25"
<b>Weight (lbs)</b>	5.5	12.5	12.5
<b>Jet angle</b>	3 x 5° + 3 x 10°	5 x 5° + 5 x 10°	5 x 5° + 5 x 10°
<b>Inserts</b>	M10 x 1	M10 x 1	M10 x 1
<b>Front Jet</b>	-	-	-
<b>Pressure (PSI)</b>	2,000 - 3,000	2,000 - 3,000	2,000 - 3,000
<b>Flow rate (GPM)</b>	30 - 50	50 - 80	50 - 120
<b>Working DN (in)</b>	6" - 12"	8" - 20"	8" - 20"
<b>Nozzles w/ceramic inserts</b>	<b>65540.760</b>	<b>65540.710</b>	<b>65540.750</b>

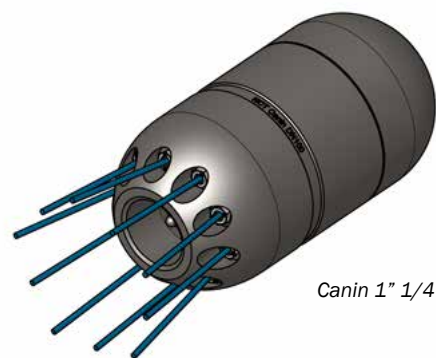

Canin 1" 1/4